


3000  
(10')  
standard  
max.

36500  
(120')  
custom  
max.



378  
(15')

508  
(20')

approx 37kg (81.5lb)

The 14 is an articulated, seamed cast glass sphere with a frosted cylindrical void that houses either a low voltage (12V, 10W halogen/xenon) or LED(12V, 1.5W) lamp. Individual pendants are visually quite subtle, but gain tremendous strength when multiplied and clustered in large groups.

Light interacts with the bubbles and imperfections of the cast glass to produce a glow reminiscent of small candles floating within spheres of water. Cast glass is an organic process, imperfect by nature and each 14 is hand made; thus, every piece produced is unique.

#### APPLICATIONS

Suitable for residential and commercial use. CSA, CE approved; approved to UL standards by CSA. Popular applications to date include clusters over tables in residential dining rooms and restaurants, accessory lighting in living rooms, decorative lighting, linear configurations or clusters over bars and kitchen islands, and large chandeliers in building lobbies and other public spaces.

#### MATERIALS

Cast glass, blown borosilicate glass, braided metal coaxial cable, electrical components and a matte white powder coated canopy.

Note: Longest and shortest lengths may have a variance of  $\pm 50\text{mm}$  (2')

Note: As an alternative to a built-in transformer, Bocci recommends mounting transformers remotely in an easily accessible and hidden location for ease of long-term maintenance.

Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)

Unless otherwise noted when ordering, all chandeliers will be outfitted to be xenon compatible.

Worldwide patents issued and pending. US patent # D556, 361  
Made in Vancouver, Canada

For additional information, please contact:

**BOCCI** Vancouver  
info@bocci.ca  
[www.bocci.ca](http://www.bocci.ca)

**BOCCI** Berlin  
infoeu@bocci.ca  
[www.bocci.ca](http://www.bocci.ca)

Approved to UL standards by CSA




ROUND

# 14.14

Design by Omer Arbel  
PRODUCT SPECIFICATION


© 2010, Bocci Design and Manufacturing Inc. All rights reserved. These drawings and the information contained herein may not be reproduced, communicated to the public, or made available in whole or in part without prior permission. Any inquiries should be directed to the following email address: [admin@bocci.ca](mailto:admin@bocci.ca).

# BOCCI



1

Measure and mark the chandelier canopy position on the ceiling.

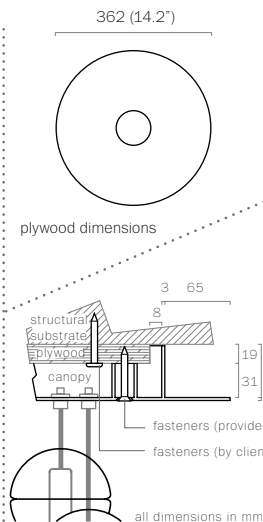


2

Note: The client is responsible for providing a robust 3/4" (19mm) plywood backing or wood blocking to securely anchor to the structural substrate.

Connections from the plywood to the structural substrate are the client's responsibility. Measure the plywood so that it fits within the canopy side walls (refer to detail above).

Anchor the plywood backing to the structural ceiling substrate.

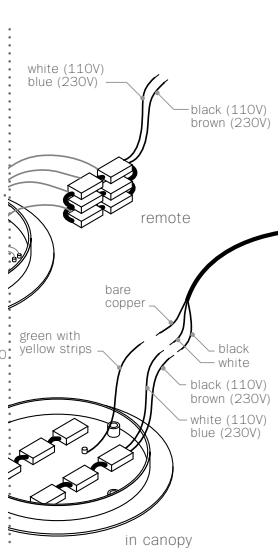

3

Connect transformers inside the canopy to line voltage. 110 V or 230 V depending on transformer.

For 110 V, connect black wire to the black wire and white wire to the white wire.

For 230 V, connect black wire to the brown wire and white wire to the blue wire.

For the ground connection, connect the green wire with yellow stripe to the bare copper wire or green wire in the junction box.


Note: As an option, Bocci recommends mounting transformers remotely in a close, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to insure compliance with the code.

4

Anchor canopy into the plywood backing using the fasteners provided.


If your chandelier has multiple canopies, mount all canopies, one by one, per the previous steps.

If your chandelier has only one canopy, proceed to step 5.



5

Remove the twist ties from the coaxial cable. Hold the roll vertically and insert your index fingers from opposite sides. Rotate your fingers in a spool like manner around each other to unroll the coaxial cable. Use patience; allow the cable to uncoil completely to avoid kinks.



6


Each pendant terminates in a "headphone jack" type connector, which plugs into a receiving receptacle in the canopy. Clients are encouraged to compose their own pendant configuration on site, thus creating a truly unique chandelier. After plugging in each pendant, turn the threaded sheathing into place by hand ensuring that it is adequately tightened. Tools are not required.

Bocci 24.1 long life bipin xenon lamp included. Bocci 24.2 LED optional. Lamping is transformer specific.

Plug the lamps into the sockets. Do not touch the lamps with your bare hands.

Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)

Note: when using a dimmer for xenon, use only a low voltage electronic dimmer.

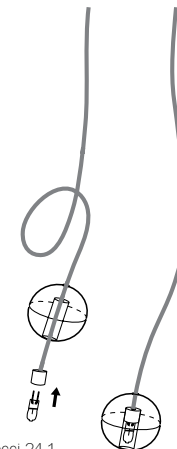

7

Clean fingerprints from glass surfaces and turn the fixture on.

For additional assistance:

**BOCCI** Vancouver  
[info@bocci.ca](mailto:info@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

**BOCCI** Berlin  
[infoeu@bocci.ca](mailto:infoeu@bocci.ca)  
[www.bocci.ca](http://www.bocci.ca)

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA



ROUND

14.14

Design by Omer Arbel  
 INSTALLATION INSTRUCTIONS

© 2010, Bocci Design and Manufacturing Inc. All rights reserved. These drawings and the information contained herein may not be reproduced, communicated to the public, or made available in whole or in part without prior permission. Any inquiries should be directed to the following email address: [admin@bocci.ca](mailto:admin@bocci.ca).

**BOCCI**